## **Mast Boom**






## MB20N/26 mast boom specifications

	MB20N	MB26
max. working height	8.0m	10.0m
max. platform height	6.0m	8.0m
max. drive height	6.0m	8.0m
max. working outreach	2.6m	3.0m
platform capacity (SWL)	215kg	215kg
platform size	0.78m x 0.73m	0.78m x 0.73m
width A	0.81m	0.99m
stowed height B	1.98m	1.98m
stowed length c	2.43m	2.8m
gross weight	2,570kg	2,672kg
drive speed - stowed - elevated	3.0km/h 0.7km/h	3.0km/h 0.7km/h
gradeability	14°/ 25%	14°/25%
inside turning radius	0.3m	0.3m
outside turning radius	1.85m	2.1m
tail swing	250mm	140mm
jib arc	138°	138°
mast rotation	360° (non-continuous)	
control system	smooth, one-hand proportional controls	
power source	4 x 6V x 375 AH batteries	


Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight operators manual for detailed instructions on the proper use and maintenance.

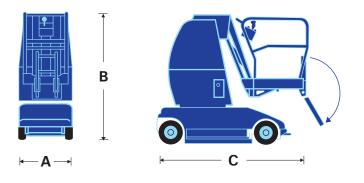





Environmental green oil

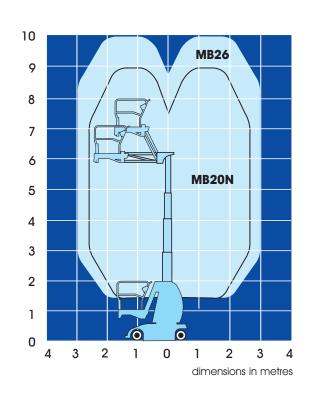

This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

