

Technical sheet :

# **AGRICULTURAL MULTIFUNCTION GRAB BUCKET - MS**

---



## **Benefits**



- Robust and versatile bucket suitable for dairy use and different AG applications.
- Complete opening >90° and powerful jaw allows working flush with walls.
- Perfect for handling non-coherent manure, silage....
- Must-have tool for livestock farm.

## **Technical characteristics**

---

- Welded teeth -MS.
- Handling materials with a density  $\leq 1000\text{kg/m}^3$ .
- Dismountable sides, spill guard and 500HB bolt-on cutting edge standard.
- Reinforced construction (base, blade and grab).
- Nitritized cylinders, all pins with "construction type" mounting.

# Dimensional drawing

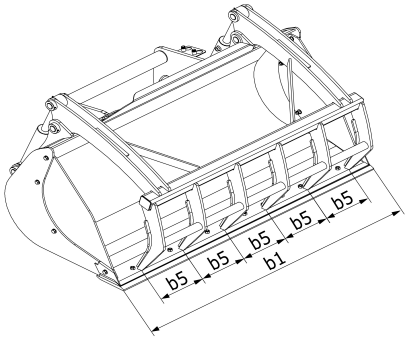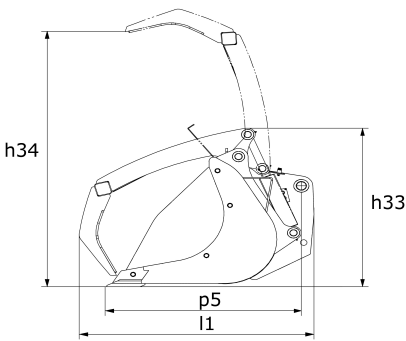

Weight and dimensions		CBG 2100 MS	CBG 1850 DA MS	CBG 2300 MS	CBG 2450 MS	CBG 2450 MS / MLT845	CBG 2450 / 1700 MS
Opened grab height (mm)	h34	1571	1571	1571	1571	1331	1979
Closed grab height (mm)	h33	986	986	986	986	985	1124
Width (mm)		2100	1850	2300	2450	2450	2450
Length (mm)		1220	1230	1220	1220	1250	1370
Depth (mm)	p5	938	1016	938	938	938	1021
Overall weight (kg)		681	630	720	742	744	895
Working Parameters							
Teeth		7	6	7	7	7	11

Machines compatibility	CBG 2100 MS	CBG 1850 DA MS	CBG 2300 MS	CBG 2450 MS	CBG 2450 MS / MLT845	CBG 2450 / 1700 MS
Reference Number	790304	790302	790306	790308	790677	52549720
MLA-T 533-145 V+	-	-	X	X	-	-
MLT 625 75 H	-	X	-	-	-	-
MLT 630-105	X	-	X	X	-	-
MLT 630-105 V	X	-	X	X	-	-
MLT 630-105 V CP	X	-	X	X	-	-
MLT 635-130 PS+	-	-	-	X	-	X
MLT 635-140 V+	-	-	-	X	-	X
MLT 730-115 V	X	-	X	X	-	-
MLT 730-115 V CP	X	-	X	X	-	-
MLT 733-115	-	-	-	X	-	X
MLT 733-115 LSU	-	-	-	X	-	X
MLT 737-130 PS+	-	-	-	X	-	X
MLT 741-140 V+	-	-	-	X	-	X
MLT 840-145 PS+	-	-	-	X	-	X
MLT 845 100 H	-	-	-	-	X	-
MLT 845 120	-	-	-	-	X	-
MLT 940-140 V+	-	-	-	X	-	X
MLT 1040-145 PS+ L	-	-	-	X	-	X
MLT-X 625 75 H	-	X	-	-	-	-
MLT-X 732	-	-	-	X	-	-
MLT-X 735 T LSU	-	-	-	X	-	X
MLT-X 737-130 PS+	-	-	-	X	-	X
MLT-X 741-140 V+	-	-	-	X	-	X
MLT-X 840-140 PS+	-	-	-	X	-	X
MLT-X 845 120	-	-	-	-	X	-
MLT-X 845 120 H	-	-	-	-	X	-
MLT-X 1040-140 PS+ L	-	-	-	X	-	X



Siège Social  
430 rue de l'Aubinière - 44150 Ancenis Cedex - France  
Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97  
[www.manitou.com](http://www.manitou.com)



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,547,824 euros - 857 802 508  
RCS Nantes