Technical sheet :

## SWING JIB





## **Benefits**

- Easy load placement directly from the cab
- Especially interesting to place loads in narrow spaces
- Improves efficiency-less time lost placing the machine
- Placement through rotation, not side shift= load moves backward when the jib swings


## **Technical characteristics**

- Single-hook jib fitted with a 15°/15° rotation rotation
- Hydraulic rotation for more accuracy
- Simple & strong attachment
- Homologated, rotating self locking hook

Swing Jib - Created on February 19, 2020 at 2:48:33 PM UTC

Capacities		PO 600 / 2500	PO 1000 / 1500	PO 2000 / 1000
Max. outreach (mm)	14	2500	1500	1000
Capacity (kg)		600	1000	2000
Weight and dimensions				
Overall height (mm)	h17	842	842	842
Width (mm)		830	830	830
Length (mm)		2874	1874	1374
Overall weight (kg)		320	275	255
Working Parameters				
Machine Equipement		Hydraulic line	No predisposition required	Hydraulic line
Rotation 1		15	15	15
Hydraulic system		true	true	true

Machines compatibility	PO 600 / 2500	PO 1000 / 1500	PO 2000 / 1000
Reference Number	784641	784642	784643
MT 733 Easy	Х	Х	х
MT 933 Easy	Х	X	х
MT 1033 easy	X	x	×
MT 1440	Х	х	х
MT 1440 A	X	x	×
MT 1440 HA	Х	х	х
MT 1440 easy ST5	X	x	×
MT 1840	Х	х	х
MT 1840 A	Х	х	х
MT 1840 HA	Х	Х	х
MT 1840 easy ST5	Х	х	х
MT-X 733	Х	Х	х
MT-X 1033	Х	х	х
MT-X 1440	Х	Х	х
MT-X 1440 A	Х	х	х
MT-X 1840	Х	Х	х
/IT-X 1840 A	х	х	х

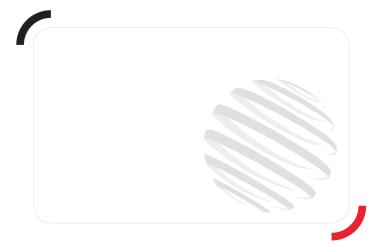



Siège Social 430 rue de l'Aubinière - 44150 Ancenis Cedex - France Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in thisbrochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,547,824 euros - 857 802 508 RCS Nantes