Technical sheet:

VARIOWINCH





Benefits

- Turns your telehandler into a crane.
- 4x faster than a standard Manitou 5t winch / 3x faster than a 3t one.
- Speed is continuously adapted to the load & operator's speed requirement.
- Easy steering from the cab or with the machine's remote control (optional).


Technical characteristics

- Hydraulic motor + end of cable automatic movement stop.
- Oil immersed negative break.
- Patented variable speed concept.
- Autonomous, 100% hydraulic speed adaptation to load.
- Homologated swivel self locking hook.
- Winch strorage stand with sleeves for yard handling.

- Note: dimensions below are given for winch placed on its stands; working weight: 700kg.

Capacities		VARIOWINCH 7.2 t
•	17	
Max. outreach (mm)	14	638
Working height (mm)	h21	36000
Capacity (kg)		7200
Weight and dimensions		
Overall length (mm)	I1	1200
Overall height (mm)	h17	2408
Width (mm)		1223
Depth (mm)	р5	638
Overall weight (kg)		860
Cable length (mm)		76
Cable loop		1
Working Parameters		
Machine Equipement		Hydraulic line, Return piping to hydraulic oil tank
Hook Speed (m/mn)		61
Hydraulic system		false

Machines compatibility	VARIOWINCH 7.2 t
Reference Number E-RECO	52576737
MRT 2470 Privilege Plus	X
MRT 3050 Privilege Plus	X
MRT 3255 Privilege Plus	X
MRT-X 2470 Privilege Plus	X
MRT-X 3050 Privilege Plus	X
MRT-X 3255 Privilege Plus	Х

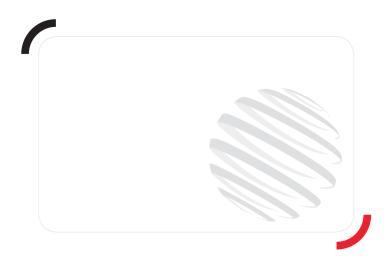



Siège Social 430 rue de l'Aubinière - 44150 Ancenis Cedex - France Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in thisbrochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,547,824 euros - 857 802 508 RCS Nantes