## Technical sheet:

## FAST OPENING PLATFORM





## **Benefits**

- Flexibility on aerial working situations
- User-friendly opening system- complete opening / closing within 50 seconds
- Heavy duty, galvanized structure for an improved longevity.
- Non-slip metal floor
- Expandable sides are independent
- Fork sleeves for yard handling

## **Technical characteristics**

- Capacity 365 / 1000 / 700 kg including 3 people
- Unfolded working width 4,4m
- Slewing platform + / 90° on both sides
- Legally approved for 3 persons
- Accessible from 3 sides (2x Side + 1 front)
- version "D": right access with side door
- version "DD" front and right access with side door


- Overload sensor

- Fork sleeves: 238mm x 100mm

| Capacities                     |     | PSE 4400 / 365          |
|--------------------------------|-----|-------------------------|
| Capacity including people (kg) |     | 365                     |
| Number of people               |     | 3                       |
| Weight and dimensions          |     |                         |
| Overall height (mm)            | h17 | 1312000                 |
| Width minimum (mm)             |     | 2282                    |
| Width maximum (mm)             |     | 4348                    |
| Length (mm)                    |     | 2261                    |
| Depth (mm)                     | р5  | 1150                    |
| Working Parameters             |     |                         |
| Machine Equipement             |     | Platform predisposition |
| Rotation 1                     |     | 180                     |
| Hydraulic system               |     | false                   |

Machines compatibility

PSE 4400 / 365

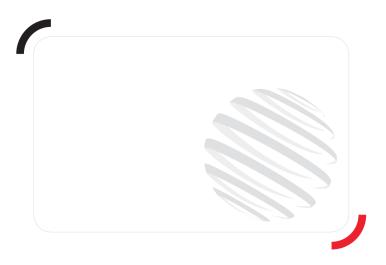



Siège Social 430 rue de l'Aubinière - 44150 Ancenis Cedex - France Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in thisbrochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes