

Technical sheet :

MANURE FORK WITH GRAPPLE





Benefits

- Rugged, multi-purpose attachment.
- Easy handling of compact manure.
- Total jaw opening allows working flush with walls.
- Versatile attachment that enables occasional square bale handling.
- Very good visibility- faster work.

Technical characteristics


- Massive structure and reinforced grapple for more longevity.
- Open structure.
- Very good manure holding by the grab.
- Adjustable grapple opening- more working accuracy.
- Forged tines & teeth- easy to dismantle.
- Well protected hydraulic components.

Dimensional drawing

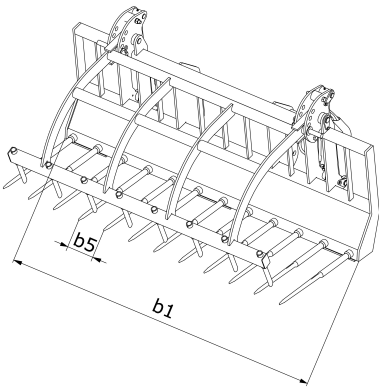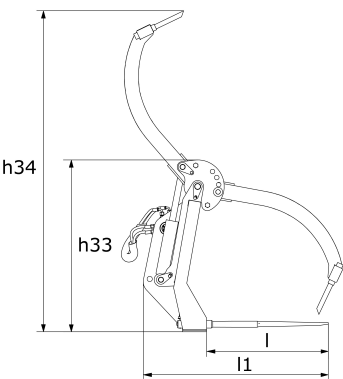

Capacities		FFGR 1700	FFGR 1950 DA	FFGR 1950	FFGR 2100	FFGR 2400	FFGR 1500
Capacity (kg)		-	-	1580	1700	1700	-
Heaped Capacity (l)		1050	1200	1200	1300	1520	930
Weight and dimensions							
Forks length (mm)	I	803	803	810	810	810	-
Fork spread (mm)	b3	225	225	225	217	205	225
Opened grab height (mm)	h34	2093	2093	2073	2073	2073	1875
Closed grab height (mm)	h33	1124	1124	1127	1127	1127	1138
Width (mm)		170	1950	1950	2100	2400	1500
Length (mm)		1320	1320	1330	1330	1330	1321
Overall weight (kg)		505	530	477	492	528	437
Working Parameters							
Machine Equipment		Hydraulic line	Hydraulic line	Hydraulic line	Hydraulic line	Hydraulic line	Hydraulic line
Teeth / Fingers		8 / 7	9 / 7	9 / 7	10 / 7	12 / 8	7 / 7
Hydraulic system		false	false	false	false	false	false

Machines compatibility	FFGR 1700	FFGR 1950 DA	FFGR 1950	FFGR 2100	FFGR 2400	FFGR 1500
Reference Number	751429	751428	751404	751403	751405	-
MLT 420 60 H	-	-	-	-	-	X
MLT 625 75 H	X	X	-	-	-	-
MLT 630-105	-	-	X	X	-	-
MLT 630-105 V	-	-	X	X	-	-
MLT 630-105 V CP	-	-	X	X	-	-
MLT 635-130 PS+	-	-	-	X	X	-
MLT 635-140 V+	-	-	-	X	X	-
MLT 730-115 V	-	-	X	X	-	-
MLT 730-115 V CP	-	-	X	X	-	-
MLT 733-115	-	-	-	X	X	-
MLT 733-115 LSU	-	-	-	X	X	-
MLT 737-130 PS+	-	-	-	X	X	-
MLT 741-140 V+	-	-	-	X	X	-
MLT 840-145 PS+	-	-	-	-	X	-
MLT 940-140 V+	-	-	-	X	X	-
MLT 1040-145 PS+ L	-	-	-	-	X	-
MLT-X 625 75 H	X	X	-	-	-	-
MLT-X 732	-	-	-	X	X	-
MLT-X 735 T LSU	-	-	-	X	X	-
MLT-X 737-130 PS+	-	-	-	X	X	-
MLT-X 741-140 V+	-	-	-	X	X	-
MLT-X 840-140 PS+	-	-	-	-	X	-
MLT-X 1040-140 PS+ L	-	-	-	-	X	-

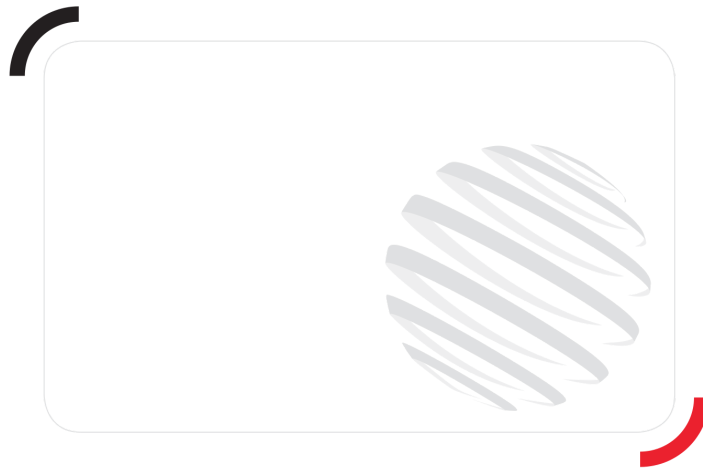

Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,547,824 euros - 857 802 508
RCS Nantes