

Technical sheet :

PLATFORM



Benefits

- Uncompromized safety in people lifting applications.
- Simple and efficient platform.
- Cost efficient solution for people lifting.
- Safety: hand rail all around the platform.
- Access from both sides for higher flexibility.
- Fork sleeves for yard handling.

Technical characteristics


- Capacity 200kg or 365kg.
- Slewing platform +/- 90° on both sides or fixed.
- Legally approved for 3 people (platform capacity includes 3 people).
- Overload (365kg only) and presence sensor.
- Painted platform.
- Non-slip metal floor.

- Fork sleeves: 238mm x 100mm.

Capacities		NAC 2M	ORH	NAC 1.2 x 0.8 M
Capacity including people (kg)		365	365	200
Number of people		3	3	2
Weight and dimensions				
Overall height (mm)	h17	1293	1319	1240
Width (mm)		2190	2190	1391
Length (mm)		1812	2490	1095
Depth (mm)	p5	1150	1150	740
Overall weight (kg)		393	570	165
Working Parameters				
Machine Equipment		Platform predisposition	Platform predisposition	Platform predisposition
Rotation 1		-	180	-
Hydraulic system		false	false	false

Machines compatibility	NAC 2M	ORH	NAC 1.2 x 0.8 M
Reference Number	788782	-	939382
MT 625 HA	X	-	X
MT 1135 HA Easy ST5	X	-	-
MT 1335 HA easy ST5	X	-	-
MT 1440 A	X	-	-
MT 1440 HA	X	-	-
MT 1840 A	X	-	-
MT 1840 HA	X	-	-
MT-X 1440 A	X	-	-
MT-X 1840 A	X	-	-
Reference Number E-RECO	921296	921304	923345
MHT 1490	X	X	-
MHT 790	X	X	-
MHT-X 1490	X	X	-
MHT-X 790	X	X	-
MRT 1440 Easy T4 S1 400°	X	-	-
MRT 1640 Easy T4 S1 360°	X	-	-
MRT 1640 Easy T4 S1 400°	X	-	-
MRT 1640 Easy T4 S2 360°	X	X	-
MRT 1840 Easy T4 S1 360°	X	-	-
MRT 1840 Easy T4 S1 400°	X	-	-
MRT 1840 Easy T4 S2 360°	X	X	-
MRT 1840 Easy T4 S2 400°	X	X	-
MRT 2145 Easy T4 S1 360°	X	-	-
MRT 2145 Easy T4 S1 400°	X	-	-
MRT 2145 Easy T4 S2 360°	-	X	-
MRT 2145 Easy T4 S2 400°	-	X	-
MRT 2150 Privilege Plus	X	X	X
MRT 2470 Privilege Plus	X	X	X
MRT 2545 Easy T4 S1 360°	X	-	-
MRT 2545 Easy T4 S1 400°	X	-	-
MRT 2545 Easy T4 S2 360°	-	X	-
MRT 2545 Easy T4 S2 400°	X	X	-
MRT 2550 Privilege Plus	X	X	X
MRT 3050 Privilege Plus	X	X	X
MRT 3255 Privilege Plus	X	X	X
MRT-X 1640 Easy 360°	-	X	-
MRT-X 1640 Easy 400°	-	X	-
MRT-X 1840 Easy 360°	-	X	-
MRT-X 1840 Easy 400°	-	X	-
MRT-X 2145 Easy 360°	X	-	-
MRT-X 2145 Easy 400°	X	-	-

Machines compatibility	NAC 2M	ORH	NAC 1.2 x 0.8 M
MRT-X 2150 Privilege Plus	X	X	X
MRT-X 2470 Privilege Plus	X	X	X
MRT-X 2545 Easy 360°	-	X	-
MRT-X 2545 Easy 400°	-	X	-
MRT-X 2550 Privilege Plus	X	X	X
MRT-X 3050 Privilege Plus	X	X	X
MRT-X 3255 Privilege Plus	X	X	X
Reference Number E-RECO 2	939240	-	-
MHT 10130	X	-	-
MHT 10180	X	-	-
MHT 10230	X	-	-
MHT-X 10130	X	-	-
MHT-X 10180	X	-	-
MHT-X 10230	X	-	-

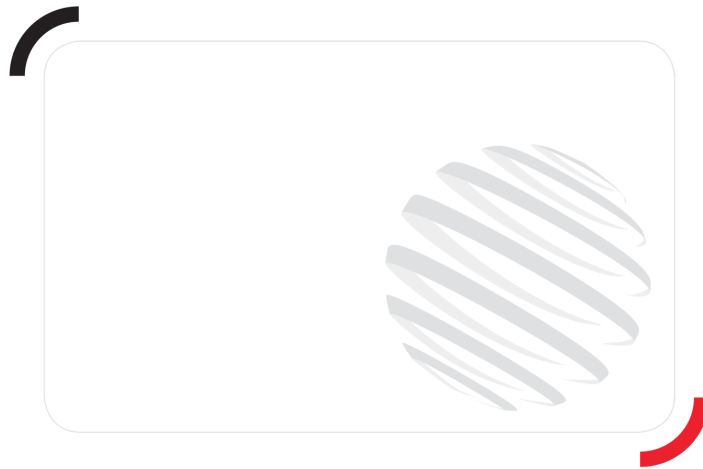

Siège Social
430 rue de l'Aubinière - 44150 Ancenis Cedex - France
Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97
www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,547,824 euros - 857 802 508
RCS Nantes