

Technical sheet :

ROOFER PLATFORM



Benefits

- Cutting edge platforms designed for roof work.
- Secured platform.
- Non-slip metal flooring.
- Heavy duty and galvanised structure for an improved longevity.
- Platform NC: large 3,5m working width.
- Roomy platform: can lift a pallet (Euro) even when folded.


Technical characteristics

- Capacity from 365 to 1000kg.
- Slewing platform + / - 90° on both sides.
- Legally approved for 3 persons.
- Presence sensor forbidding any movement after door opening.
- Overload sensor.
- Physical sensor allowing door opening only if roof contact.

Capacities		NC 365	NC 1000
Capacity including people (kg)		-	1000
Number of people		3	3
Weight and dimensions			
Overall height (mm)	h17	-	1600
Width minimum (mm)		2420	2420
Width maximum (mm)		3682	3682
Length (mm)		2915	2915
Depth (mm)	p5	1260	-
Overall weight (kg)		920	920
Working Parameters			
Machine Equipment		-	Platform predisposition
Rotation 1		-	180
Hydraulic system		false	false

Machines compatibility		NC 365	NC 1000
Reference Number		788789	788791
MT 1440 A		X	X
MT 1440 HA		X	X
MT 1840 A		X	X
MT 1840 HA		X	X
MT-X 1440 A		X	X
MT-X 1840 A		X	X
Reference Number E-RECO		923309	921294
MRT 1440 Easy T4 S1 400°		-	X
MRT 1440 Easy T4 S2 400°		-	X
MRT 1640 Easy T4 S1 360°		-	X
MRT 1640 Easy T4 S1 400°		-	X
MRT 1640 Easy T4 S2 360°		-	X
MRT 1640 Easy T4 S2 400°		-	X
MRT 1840 Easy T4 S1 360°		-	X
MRT 1840 Easy T4 S1 400°		-	X
MRT 1840 Easy T4 S2 360°		-	X
MRT 1840 Easy T4 S2 400°		-	X
MRT 2145 Easy T4 S1 360°		-	X
MRT 2145 Easy T4 S1 400°		-	X
MRT 2145 Easy T4 S2 360°		-	X
MRT 2145 Easy T4 S2 400°		-	X
MRT 2150 Privilege Plus		-	X
MRT 2470 Privilege Plus		-	X
MRT 2545 Easy T4 S1 360°		-	X
MRT 2545 Easy T4 S1 400°		-	X
MRT 2545 Easy T4 S2 360°		-	X
MRT 2545 Easy T4 S2 400°		-	X
MRT 2550 Privilege Plus		-	X
MRT 3050 Privilege Plus		-	X
MRT 3255 Privilege Plus		-	X
MRT-X 1440 Easy 400°		-	X
MRT-X 1640 Easy 360°		-	X
MRT-X 1640 Easy 400°		-	X
MRT-X 1840 Easy 360°		-	X
MRT-X 1840 Easy 400°		-	X
MRT-X 2145 Easy 360°		-	X
MRT-X 2145 Easy 400°		-	X
MRT-X 2150 Privilege Plus		-	X
MRT-X 2470 Privilege Plus		-	X
MRT-X 2545 Easy 360°		-	X

Machines compatibility	NC 365	NC 1000
MRT-X 2545 Easy 400°	-	X
MRT-X 2550 Privilege Plus	-	X
MRT-X 3050 Privilege Plus	-	X
MRT-X 3255 Privilege Plus	-	X

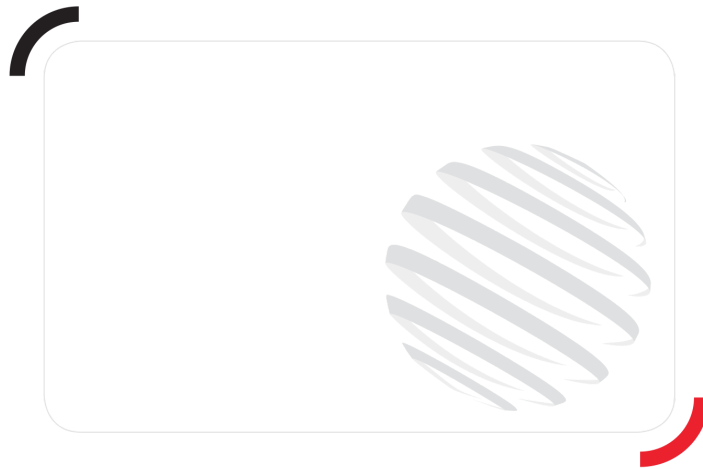

Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508
RCS Nantes