

Technical sheet :

# ***SHEAR GRAB***

---



## **Benefits**

- Suitable for any type of silage.
- Efficient and accurate cutting of the silage pit.
- Very clean silage pit face avoiding secondary fermentation.
- Powerful attachment for a fast cutting.
- Closed structure to limit material losses (except SHG 1700 / 850).

## **Technical characteristics**


---

- Boxed structure- rigidity & longevity.
- Body made of high resistance steels.
- Heavy duty teeth for easy penetration.
- Lateral shears for a good pit penetration & clean cutting.
- Increased cylinder diameter for more power.
- Bolt-on cutting teeth for easy maintenance (except SHG 1700 / 850: welded).



Capacities		SHG 1700 / 850	SHG 1800 / 1350	SHG 1600 / 1200	SHG 2200 / 1650	SHG 2400 / 1800
Heaped Capacity (l)		850	1350	1200	1650	1800
Weight and dimensions						
Overall length (mm)	l1	1267	1295	1295	1295	1295
Opened grab height (mm)	h34	-	1475	1475	1475	1475
Closed grab height (mm)	h33	963	1010	1010	1010	1010
Width (mm)		1865	1854	1654	2254	2454
Depth (mm)	p5	-	850	850	850	850
Overall weight (kg)		710	749	705	835	936
Working Parameters						
Machine Equipment		Hydraulic line	Hydraulic line	Hydraulic line	Hydraulic line	Hydraulic line
Teeth		14	14	14	14	14
Hydraulic system		false	false	false	false	false

Machines compatibility	SHG 1700 / 850	SHG 1800 / 1350	SHG 1600 / 1200	SHG 2200 / 1650	SHG 2400 / 1800
Reference Number	757723	52000381	52000380	52000382	52000383
MLT 625 75 H	-	-	X	-	-
MLT 630-105	-	X	-	-	-
MLT 630-105 V	-	X	-	-	-
MLT 630-105 V CP	-	X	-	-	-
MLT 635-130 PS+	-	-	-	X	-
MLT 635-140 V+	-	-	-	X	-
MLT 730-115 V	-	X	-	-	-
MLT 730-115 V CP	-	X	-	-	-
MLT 737-130 PS+	-	-	-	-	X
MLT 741-140 V+	-	-	-	-	X
MLT 840-145 PS+	-	-	-	-	X
MLT 940-140 V+	-	-	-	-	X
MLT 961-145 V+ L	-	-	-	-	X
MLT 1040-145 PS+ L	-	-	-	-	X
MLT-X 625 75 H	-	-	X	-	-
MLT-X 732	-	-	-	X	-
MLT-X 735 T LSU	X	-	-	X	-
MLT-X 737-130 PS+	-	-	-	-	X
MLT-X 741-140 V+	-	-	-	-	X
MLT-X 840-140 PS+	-	-	-	-	X
MLT-X 961-145 V+ L	-	-	-	-	X
MLT-X 1040-140 PS+ L	-	-	-	-	X

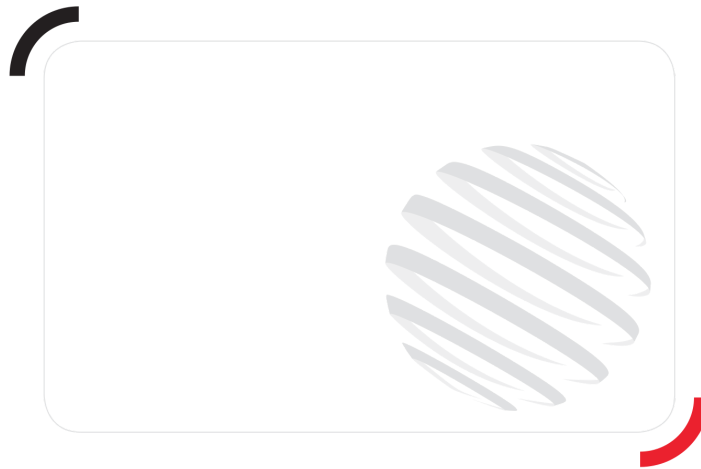

Siège Social  
430 rue de l'Aubinière - 44150 Ancenis Cedex - France  
Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97  
[www.manitou.com](http://www.manitou.com)



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,547,824 euros - 857 802 508  
RCS Nantes